



Rebound™

CLEANER AND ENHANCER



An effective one step cleaner and enhancer, Rebound may be applied by automatic scrubber or damp-mop. Cleans and enhances coating for a brilliant wet-look shine when burnished with UHS burnishers.

DIRECTIONS


Read all directions and Safety Data Sheets (SDS) before using.

1. Sweep the floor with a dust mop.
2. For FS, FSE, and MPE products, dilute product at: 1:32 (32 ml per 1 liter or 4 US oz per gallon of water) for automatic scrubber application or 1:64 (16 ml per 1 liter or 2 US oz per gallon of water) for mop-on application. For DTC, DD, and D products, follow on-label instructions for proper dilution.
3. Dispense in automatic scrubber or mop bucket.
4. Scrub the floor and pick up solution in one pass or scrub with a damp mop.
5. Allow floor to dry thoroughly.
6. Burnish floor.

PRODUCT INFO

| Product Code | 211FS | 211FSE | 211MPE | 211DTC | 211D | 211DD |
|--------------------|-----------------|---------------|--------------|------------------|------------------|------------------|
| Volume | 2.50 US gallons | 10 liters | 4 liters | 0.53 US gallons | 1.06 US gallons | 0.50 US gallons |
| Shipping Package | 2 x 2.5 gallons | 2 x 10 liters | 4 x 4 liters | 4 x 0.53 gallons | 4 x 1.06 gallons | 3 x 0.50 gallons |
| Pallet Quantity | 48 | 48 | 48 | 88 | 48 | 112 |
| Automatic Scrubber | 1:32 | 1:32 | 1:32 | 1:128 | 1:64 | 1:128 |
| Mop-on Application | 1:64 | 1:64 | 1:64 | 1:256 | 1:128 | 1:256 |

SURFACES

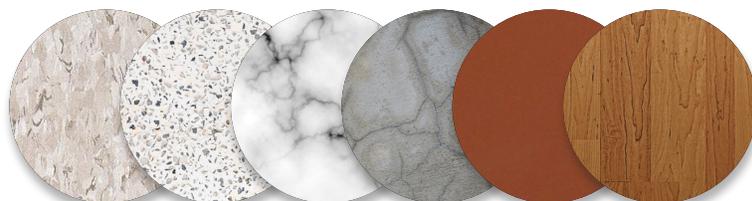

VCT TERRAZZO MARBLE CONCRETE QUARRY TILE TREATED WOOD

TECHNICAL DATA

| | |
|-------------------------------|---|
| Description | Water-based cleaner/enhancer |
| Appearance | Clear green |
| pH | 9.0 (as supplied) |
| ASTM E70-07 | DTC/DD: 10.5 (as supplied) |
| Viscosity (Brookfield) | <10 centipoise |
| @ 68°F (20°C) | |
| Dry Time | About 15 minutes |
| VOC | 0.01% (as supplied) |
| 40 CFR Part 59 Subpart C | <0.01% (1:32 dilution) <0.01% (1:128 dilution) DTC/DD: 0.02% (as supplied) |
| Non-volatile solids | 11% |
| ASTM D2834-95 (2008) | DTC/DD: 46% |
| Fragrance | Lemon-lime |
| Slip Resistance | Meets requirements |
| ULTM410 | |
| Shelf Life | 1 year |
| ASTM D1791-93 (2008) | |
| Density | 8.4 lb/gal @ 68°F |
| ASTM D1475-98 (2008) | 1.01 kg/L @ 20°C DTC/DD: 8.6 lb/gal @ 68°F DTC/DD: 1.03 kg/L @ 20°C |
| Freeze/Thaw | Passes 3 cycles |
| ASTM D3209-93 (2008) | |
| Container | 2.5 US gal/9.5 L (FS packaging) 2.64 US gal/10 L (FSE packaging) 1.06 US gal/4 L (MPE packaging) 0.53 US gal/2 L (DTC packaging) 1.06 US gal/4 L (D packaging) 0.50 US gal/1.89 L (DD packaging) |



Floor Coating and Finishing materials as to slip resistance only. 42E6

